



### S Series Screenless Beside-the-Press


The S Series, the latest innovation from Cumberland, features screenless operation with no longs regrind. The small footprint squeezes into the tightest of spaces. Its rugged, heavy-duty construction packed with innovative standard features assures years of dependable, reliable service.

#### Standard Features


- Screenless operation produces clean, no longs regrind
- Smallest footprint squeezes into the tightest of spaces
- Quick and easy, no tools access – just open the doors
- Vacuum bin with 1” or 2” (25 or 51 mm) diameter take-offs available
- Solid dowel and bolted construction
- Locking swivel casters mounted on base
- TEFC 230/3/60 or 460/3/60 gear motor
- 115/1/60 control voltage wired with electrical/mechanical safety interlock

#### Optional Features

- Compressed air evacuation system
- High level indicator

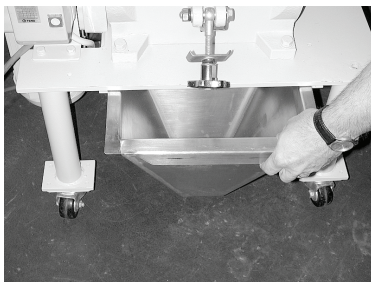

Slide out discharge

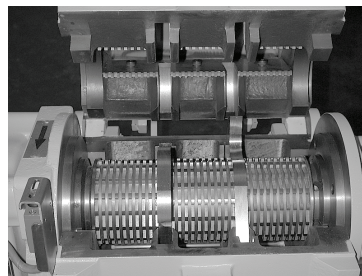

Clamshell opening for easy cleaning



“Tool free” opening for quick access during cleaning



## Specifications

Model	S1010	S1213	S1616
Chamber size, in (mm)	10 x 10.5 (254 x 268)	11.5 x 13.5 (292 x 343)	16 x 16 (407 x 407)
Cutter size, in (mm)	0.18 (5mm)		
Feed Height, in (mm)	52 (1321)	60 (1524)	63 (1600)
Throughput , lbs/hr (kgs/hr)	30 (14)	40 (18)	50 (23)
Working Envelope (LXW), in (mm)	29 x 18 (736 x 457)	32.5 x 23 (826 x 584)	23 x 49 (584 x 1245)
Weight , lbs (kgs)	396 (180)	606 (275)	992 (450)